

Product properties

Professional UV masking tape with extra good adhesion for the extra demanding tasks for sharp and low edges on various outdoor surfaces, has low water absorption and extra UV protection.

- Extra good adhesion
- Extra UV resistant
- Extra sharp edges



Product use

Used for the demanding outdoor renovation and painting tasks that place extra high demands on the tape's properties. Ensures sharp edges and has extra good adhesion on smooth and slightly rough surfaces.

Substrate

Must be clean, dry and solid.


Useful Information

Base material: Washi - Adhesive: Acrylic - Thickness (mm): 0,1 - Tensile Strength (N/10mm): 38 - Adhesion to stainless steel (N/10mm): 2,1 - Temperature Resistance: Up to 100 degrees C - UV resistance (days): 150 - Shelf life: 12 months

Good practice

Always perform a test treatment for a check of adhesion.

Supplementary Info

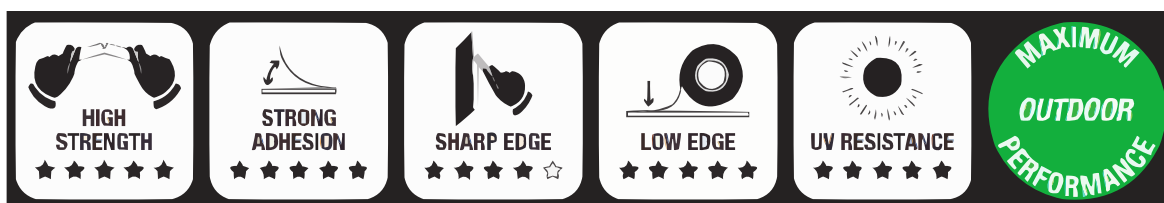

Technical Data

| | |
|-----------------|---------------------------------------|
| Storage | Store in dry place |
| Available Sizes | 24mm x 50 m; 36mm x 50 m; 48mm x 50 m |

Current TDS Version

March 2024